

# POINT MAN I.D. Card Printer

## (201-00A-001)



- *ID Card Printer for Identification Card, Membership Card, Certificate Card, Emoloyee Card, Gift Card, Debit Card etc.*
- *Field Proven Technology in Banking Markets through Strict BMT Test.*

### MAIN FEATURES


Color & monochrome printing  
 Easy to exchange ribbon & TPH  
 Video CD & Maintenance Manual  
 Strong encoding based on long banking experience.  
 Individual card slot for reprinting  
 Design software "The Designer"  
 RFID ribbon protection

### OPTIONS

Flipper Module (201-00P-100)  
 Magstripe Encoder (201-00P-200)  
 RFID Encoder (201-00P-300)  
 Contact Chip Encoder (201-00P-400)  
 Ethernet (10/100 mbps)  
 Scanner (Dual Side Color 600dpi)

### CONSUMABLES

YMCKO Ribbon 200 prints (201-00C-005)  
 Black Ribbon 1,000 prints (201-00C-006)  
 Blank Card (201-00C-001)  
 Printhead (201-00C-020)

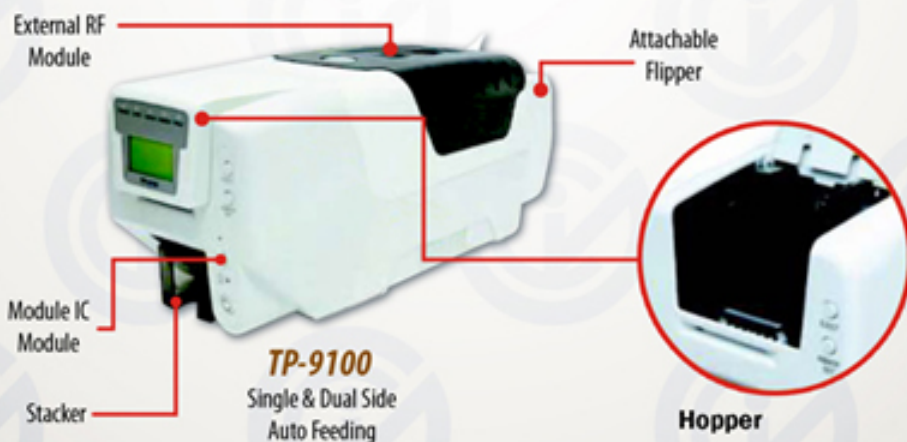

**Specs & Pictures may vary from actual unit.**  
**12% EVAT not included**



# SPECIFICATIONS

Item	Sub Item	Description	
		TP-9100	
Print	Print Method	Dye-Sublimation (Color), Thermal Transfer (Mono)	
	Print Speed	Mono : 4 sec/pc, Single Color : 26 secs/pc Dual Color: 35 sec/pc	
	Print Mode	Single & Dual Side Print	
	TPH	Resolution: 300dpi (11.8dpm)	
	Color	Pulse Life: 1 X 108 Pulses / Abrasion: 50Km 16.7 Million Color	
	Ribbon		KO-500 prints/roll, YMCKO-200 prints/roll
			YMCKOK-167 prints/roll
			K, Silver, Gold, Red, Blue, White - 1000 prints/roll
		Protection by RFID Tag	
Card	Card Types	PVC, Composite PVC	
	Card Thickness	0.2mm ~ 1.2mm	
	Card Format	ISO CR-80-ISO 7810 (53.98mm W X 85.60 mm L / 3.375" X 2.125")	
Encoding (option)	MS Card	ISO7811 (Track 1,2,3), Coercivity: Hi-Co/Lo-Co Head Life : 4,000,000 pass	
	Contact(IC) Card	ISO7816, EMV, K-cash, Contact Landing Type IC Contact Life : 1000,000 contacts	
	Mobile Chip Card	Default, ISO 7816	
	Contactless(RF) Cads	MiFare, ISO 14443 A,B, ISO15693	
Network (option)	Ethernet (TCP/IP)	Built-in Ethernet (10/100 Mbps)	
Scanner (option)	Resolution	Dual Side Color : 600dpi	
	Speed	4 sec/pc (scanner speed only)	
Other	Barcode	Code 39, Code 128 B & C with & without check digit	
		2 of 5 interleaved	
		UPC-A, EAN 8 & EAN 13	
		PDF-417 2D bar code and other symbol can be printed via Windows drivers	
	Fonts	True Type fonts via Windows drivers	
	CPU	32 bit processor	
	RAM	16 MB	
	SAM	PLCC 1 (Extra - 2 sockets), SIM 4 sockets	
I / F Port	USB2.0, RS-232C, Network (option)		
Feeding Method	Printer Driver	Windows 2000, XP, Vista	
	Single Feeding	Single-card feeding	
	Auto Feeding	Hopper - 100 cards Stacker - 70 cards	
	Motor	Step Motor Driven	
Temperature	Operating Temp	0 ~ 50℃, 20 ~ 90% RH	
	Storage Temp	-25 ~ 70℃	
Power	Adaptor	Input: 100V ~ 250V, 50/60Hz, Output: DC 24V	
Size	Dimension (mm)	Single: 403 (L) X 202(H) x 192(W)	
		Dual: 471(L) X 202(H) X 192(W)	
	New Weight	Single: 5.5kg / Dual: 6.5kg	

MADE IN KOREA

**EXCLUSIVE PHILIPPINE DISTRIBUTOR:**